

B.E.G.**LUXOMAT®**

Indoor 180-S covering included Set 92135-92141

Slave PIR wall-mounted motion detector with 180° coverage and a range of up to 10 m (150 m²), for expanding the detection zone

Order data

Designation	Colour	Art.No
Indoor 180-S covering included	pure white	92135
Surface mounting socket Indoor 180	pure white	92141

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	88 x 88 x 42 mm (92141)
Power consumption:	approx. 0.2 W
Detection area:	horizontal 180° (Wall mounting) max. 10 m across max. 3 m towards
Range:	
Monitored area (tangential movement):	150 m² / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 2.2 m / 1.1 m
Degree / class of protection:	IP54 (92141)
Impact strength:	IK05
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	pure white mat, similar to RAL9010
Pulse interval:	2 or 9 sec

Product information

Set : Indoor 180-S covering included + Surface mounting socket Indoor 180 pure white mat, similar to RAL9010

Slave device



For extending the detection area of a Master device

Compatible with 230 V devices. Concerning exceptions please see the respective master device.

Available with covering (centre plate dimensions 60 x 60 mm) or without covering for use with covering (centre plate dimensions 50 x 50 mm) in 5 different colours

In combination with centre plates usable with current frame systems of various manufacturers

B.E.G. frames and centre plates for combination with other frame systems available

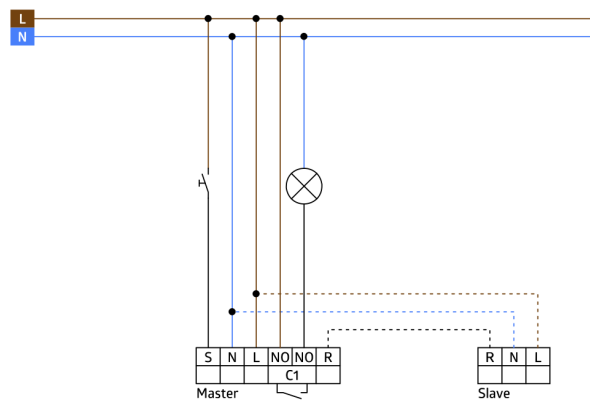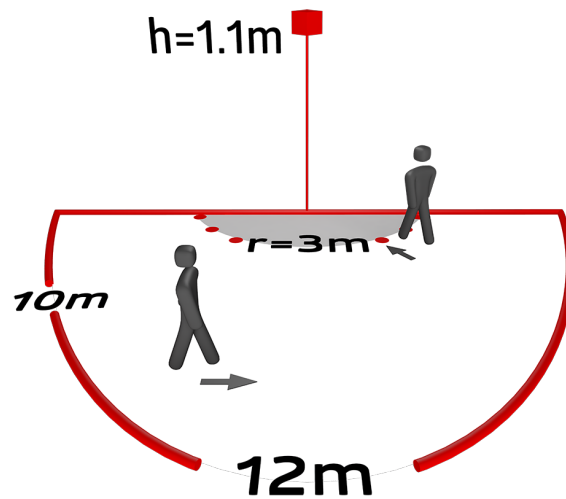

Set items

To receive the bundle according to the technical specification, please order the items listed.



Indoor 180-S covering included

Art.No: 92135

Voltage: 110 – 240 V AC 50 / 60 Hz

Dimensions: covering included 87 x 87 x 61 mm

Power consumption: approx. 0.2 W



Surface mounting socket Indoor 180

Art.No: 92141

Dimensions: 88 x 88 x 42 mm

Degree / class of protection: IP54

Impact strength: IK05