



## PD2N-KNXs-BA-FC Set 93533-93773-92199

KNX PIR motion detector (Basic) with 360°  
detection and a range of up to Ø10m (78 m²)

### Order data

| Designation                     | Colour | Art.No |
|---------------------------------|--------|--------|
| PD2N-KNXs-BA-FC                 | white  | 93533  |
| Cover ring PD2N FC              | black  | 93773  |
| Wire basket BSK (Ø 200 x 90 mm) | white  | 92199  |

## Technical data

|                                        |                                                                                                        |
|----------------------------------------|--------------------------------------------------------------------------------------------------------|
| Voltage:                               | via KNX BUS                                                                                            |
| Dimensions:                            | <b>Ø 200 x 90 mm (92199)</b>                                                                           |
| Typ. power input:                      | 12 mA                                                                                                  |
| Detection area:                        | horizontal 360°<br>(Ceiling mounting)<br>max. Ø 10 m across<br>max. Ø 6 m towards<br>max. Ø 4 m seated |
| Range:                                 |                                                                                                        |
| Monitored area (tangential movement):  | 78 m² / 2.5 m mounting height                                                                          |
| Mounting height min./max./recommended: | 2 m / 5 m / 2.5 m                                                                                      |
| Degree / class of protection:          | IP20 / Class III                                                                                       |
| Impact strength:                       | <b>IK09 (92199)</b>                                                                                    |
| Ambient temperature:                   | -25 °C to +55 °C                                                                                       |
| Housing:                               | <b>polycarbonate, UV-resistant + coated steel basket (92199)</b>                                       |
| Material color:                        | <b>black mat, similar to RAL9005 (93773)</b>                                                           |
| Number of light sensors:               | 2                                                                                                      |
| Number of PIR sensors:                 | 1                                                                                                      |
| KNX TP 256:                            | Yes                                                                                                    |
| KNX Secure:                            | Yes                                                                                                    |
| Brightness set value:                  | 5 – 2000 Lux                                                                                           |

## Product information

Set : PD2N-KNXs-BA-FC + Cover ring PD2N FC black mat, similar to RAL9005 + Wire basket BSK (Ø 200 x 90 mm) white

KNX occupancy detector with integrated KNX bus connector

KNX Secure ready

Individual adaption of the PIR sensor sensitivity

Mixed light measurement using internal, external and remote (optional) light sensors

Intelligent semi-automatic mode, occupancy-independent regulating mode (photoelectric switch), full automatic mode

1 x light output (for regulating or switching), 1 x slave output

Soft-start

Deactivatable status indicators




Detection area can be extended thanks to master-slave-mode

Extensive optimization options for light measurement

Measured light value is communicated to the bus

Manual influence via external KNX push buttons possible

Behaviour upon bus voltage return definable at choice

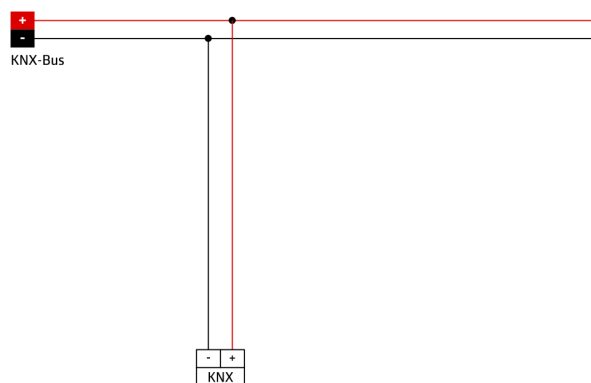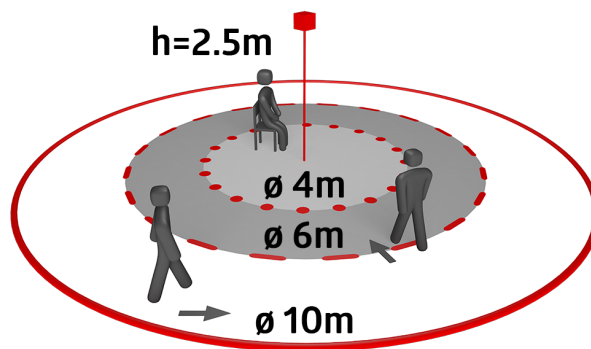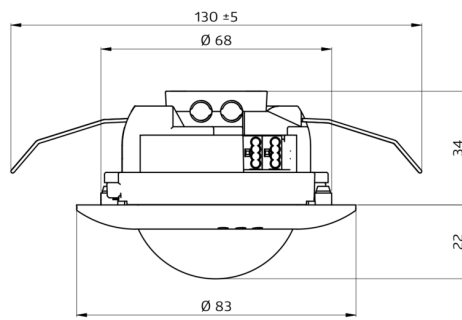

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **PD2N-KNXs-BA-FC**

Art.No: 93533


Voltage: via KNX BUS  
Dimensions: Ø 83 x 55 mm  
Typ. power input: 12 mA



### **Cover ring PD2N FC**

Art.No: 93773

Dimensions: Ø 82 x 13 mm  
Impact strength: IK05  
Housing: polycarbonate, UV-resistant



### **Wire basket BSK (Ø 200 x 90 mm)**

Art.No: 92199

Dimensions: Ø 200 x 90 mm  
Impact strength: IK09  
Housing: coated steel basket