

B.E.G.**LUXOMAT®**

PD4-S-GH-SM Set 92265-92376

Slave PIR motion detector with 360° coverage and a detection area of up to 30 x 19 m (440 m²) at a mounting height of 16 m, for high-bay warehouses

Order data

Designation

PD4-S-GH-SM

Surface mounting socket IP65 PD4-SM
IP54**Colour**

white

white

Art.No

92265

92376

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	Ø 101 x 76 mm
Power consumption:	approx. 0.2 W
Detection area:	horizontal 360° oval (Ceiling mounting)
Range:	30 m x 19 m
Monitored area (tangential movement):	440 m² / 14 m mounting height
Mounting height min./max./recommended:	5 m / 16 m / 14 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK04
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010
Pulse interval:	2 or 9 sec

Product information

Set : PD4-S-GH-SM + Surface mounting socket IP65
PD4-SM IP54 white

Slave device for high-bay applications

For extending the detection area of a Master device

Trigger pulse to master device upon detected movement
independent of the ambient light level




Compatible with 230 V devices. Concerning exceptions please
see the respective master device.


For further information

<https://www.beg-luxomat.com/en-in/solutions/areas-of-application/great-mounting-heights/>

There are markings to ensure correct alignment during
installation

**When used in high-bay warehouses, care should be
taken that, in the cross-aisles of the warehouse,
detectors are installed that can detect movement only
in the desired aisle locations, by using blinds or other
technical arrangements.**

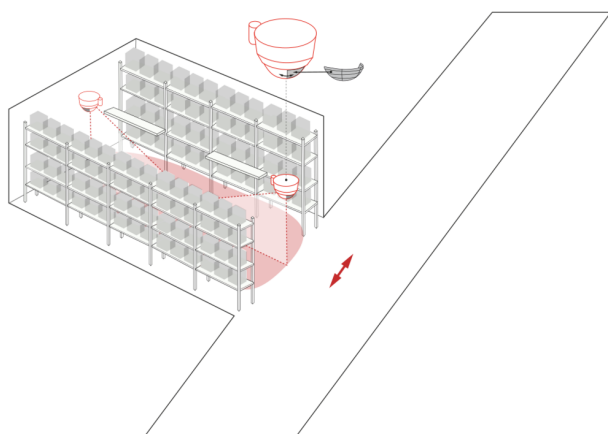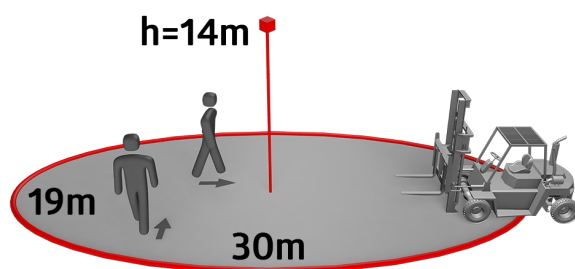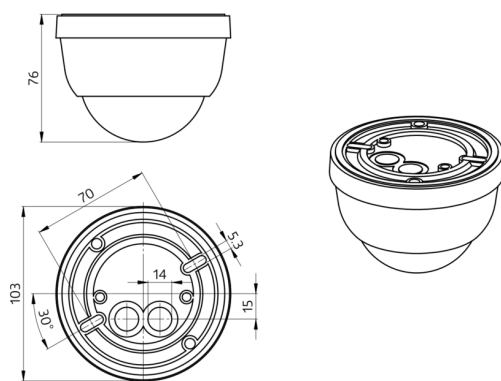

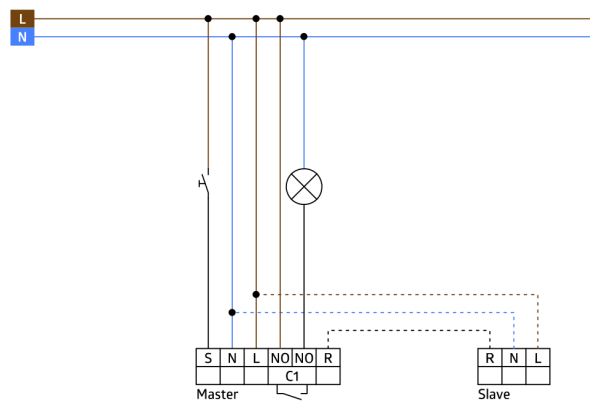

Set items

To receive the bundle according to the technical specification, please order the items listed.



PD4-S-GH-SM

Art.No: 92265

Voltage: 110 – 240 V AC 50 / 60 Hz

Dimensions: Ø 101 x 76 mm

Power consumption: approx. 0.2 W



Surface mounting socket IP65 PD4-SM IP54

Art.No: 92376

Dimensions: Ø 115 x 70 mm

Degree / class of protection: IP65

Impact strength: IK07