

**B.E.G.****LUXOMAT®**

## PD4N-M-DACO-1C DALI-2 Set 93463-93788-92199

DALI-2 PIR motion detector with integrated DALI application controller, 360° detection, and a range of up to Ø24m (450 m²), with switching relay

### Order data

| Designation                       | Colour | Art.No |
|-----------------------------------|--------|--------|
| PD4N-M-DACO-1C DALI-2             | white  | 93463  |
| SM socle mounting set IP54 PD4N H | black  | 93788  |
| Wire basket BSK (Ø 200 x 90 mm)   | white  | 92199  |

### Areas of application

- entrance halls
- corridors/hallways
- small offices
- open-plan offices
- conference rooms
- classrooms/seminar rooms
- sports halls/ storage rooms

## Technical data

|                                           |                                                                                                                      |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Voltage:                                  | 230 V AC $\pm 10\%$<br>50 Hz                                                                                         |
| Dimensions:                               | <b>Ø 200 x 90 mm<br/>(92199)</b>                                                                                     |
| Power consumption:                        | approx. 2 W                                                                                                          |
| Slave devices:                            | up to 8                                                                                                              |
| Detection area:                           | horizontal 360°<br>(Ceiling<br>mounting)<br>max. Ø 24 m<br>across<br>max. Ø 8 m<br>towards<br>max. Ø 6.4 m<br>seated |
| Range:                                    |                                                                                                                      |
| Monitored area<br>(tangential movement):  | 450 m <sup>2</sup> / 2.5 m<br>mounting height                                                                        |
| Mounting height<br>min./max./recommended: | 2 m / 10 m / 2.5<br>m                                                                                                |
| Degree / class of<br>protection:          | <b>IP54 (93788)</b>                                                                                                  |
| Impact strength:                          | <b>IK09 (92199)</b>                                                                                                  |
| Ambient temperature:                      | -25 °C to +50 °C<br><b>polycarbonate,<br/>UV-resistant +<br/>coated steel<br/>basket (92199)</b>                     |
| Housing:                                  | <b>black, similar<br/>to RAL9005<br/>(93788)</b>                                                                     |
| Material color:                           |                                                                                                                      |

### Channel 1 (lighting control)

|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| DALI output:                  | 80 mA<br>(guaranteed),<br>125 mA (max.),<br>shut down<br>mechanism   |
| Supported control gear:       | DT0, DT5, DT6,<br>DT7                                                |
| Supported control<br>devices: | - (single master)                                                    |
| Follow-up time:               | 1 min – 150 min<br>10 – 30 % / OFF /<br>5 min – 60 min /<br>$\infty$ |
| Orientation light:            |                                                                      |
| Brightness set value:         | 10 – 2500 Lux                                                        |

### Channel 2 (HVAC or lighting control)

|                  |                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Switching power: | 2300 W, $\cos \varphi = 1$<br>1150 VA, $\cos \varphi = 0.5$<br>800 W LED<br>max. inrush<br>current $I_p$ (20<br>ms) = 165 A |
| Type of contact: | 1x $\mu$ -contact,<br>dry, bistable                                                                                         |

## Product information

Set : PD4N-M-DACO-1C DALI-2 + SM socle mounting  
set IP54 PD4N H black, similar to RAL9005 + Wire  
basket BSK (Ø 200 x 90 mm) white

Occupancy detector with integrated DALI application  
controller for energy-efficient lighting control

DALI-2 certified product

Integrated DALI power supply

DALI interface for controlling digital, dimmable ECGs in  
broadcast mode

Manual switching or dimming via conventional pushbuttons

Bidirectional IR communication enables fast integration into  
the project management function of the B.E.G. One app

Complete range of functions can only be activated using the  
BLE-IR-Adapter and a compatible Smartphone or Tablet  
(Android, iOS).

Semi-automatic, full automatic, presence-independent or  
light-independent mode adjustable

Powerful switching relay for different operating modes, e.g.  
Cut-off function for DALI ballasts, HVAC, blackboard  
illumination.

Adjustable regulation dynamics (minimum and maximum  
values)

Adjustable speed and delay of the regulation

Single master version, not networkable

Detection area can be extended by using slave devices

Mixed light measurement with internal and external light  
sensor

DALI output power can be increased with accessories

Integrated daylight harvesting circuit (or switch output)

Adjustable switch-on value

Last value - Reminder function for switch-on value

Adjustable brightness set value and reflection factor

Indication of the current light sensor value in the B.E.G. One  
App

Self-check and display of device errors in the B.E.G. One App

Status LEDs can be activated / deactivated

PIN code

Corridor function - Deactivates the possibility to switch off the  
light via the push-button

Follow-up time: 5 min – 120 min,  
Alarm pulse,  
Pulse

Light measuring: Mixed light  
measuring

Number of DALI participants can be determined quickly and reliably via the B.E.G. Online DALI Line Planner

Avoidance of standby losses of the lighting system in accordance with EnEV DIN V 18599-4

Software is backwards compatible with the first generation (except DSI, double lock and corridor function)


Factory setting 10 min follow-up time and 500 lux brightness set value

Including pre-assembled spring clamp with strain relief and contact protection cap for recessed ceiling mounting

Accessory for surface mounting available

Accessories for wall mounting optionally available

Further accessories for colour matching optionally available

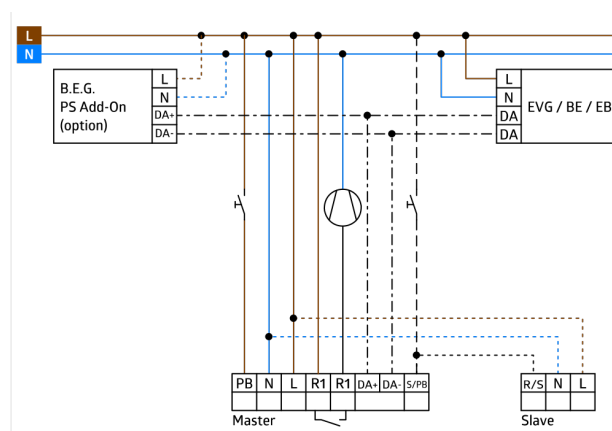

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **PD4N-M-DACO-1C DALI-2**

Art.No: 93463


Voltage: 230 V AC  $\pm 10\%$  50 Hz  
Dimensions:  $\varnothing$  106 x 95 mm  
Power consumption: approx. 2 W



### **SM socle mounting set IP54 PD4N H**

Art.No: 93788

Dimensions:  $\varnothing$  110 x 45 mm  
Degree / class of protection: IP54  
Material color: black, similar to RAL9005



### **Wire basket BSK ( $\varnothing$ 200 x 90 mm)**

Art.No: 92199

Dimensions:  $\varnothing$  200 x 90 mm  
Impact strength: IK09  
Housing: coated steel basket